


SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

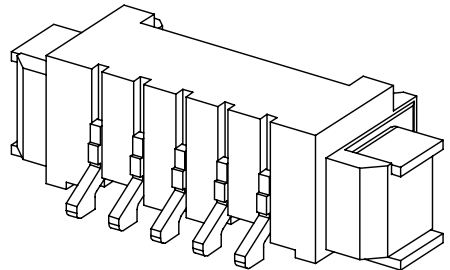


**SPECIFICATION**

- Voltage rating: 125V AC, DC
- Current Rating: 1.0A, AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 100MΩ min
- Temperature range: -25° C ~ +85° C

**WAFER**

- Material: Base: LCP UL94V-0 Beige  
Solder Tab: Brass Tin-plated  
Contacts: Brass Tin-plated

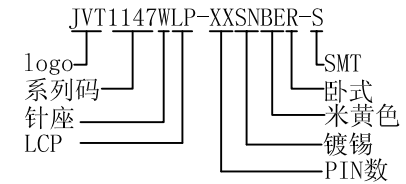

No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
2	1.25	4.25	7.75
3	2.50	5.50	9.00
4	3.75	6.75	10.25
5	5.00	8.00	11.50
6	6.25	9.25	12.75
7	7.50	10.50	14.00
8	8.75	11.75	15.25
9	10.00	13.00	16.50
10	11.25	14.25	17.75
11	12.50	15.50	19.00
12	13.75	16.75	20.25
13	15.00	18.00	21.50
14	16.25	19.25	22.75
15	17.50	20.50	24.00
16	18.75	21.75	25.25

GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期		单位	mm	比例	1:1	日期	20130603
----	------	----	--	----	----	----	-----	----	----------

核准	审核	绘图	品名	MX1.25mm SMT WF 90°		
	BOLLY	许向毅	料号	JVT1147WLP-XXSNBER-S		
			图名	041	版本	A